Septu 600

PN: PWUP-LI060SP-AZ01B
EAN: 6422956004071

The personal work protector



2x
2 Schuko Outlets with protection

RJ11 Outlet Protection

Overload Protection

Features

- Boost and buck AVR for voltage stabilization
- Auto restart while AC is recovering
- Simulated sine wave
- Off-mode charging
- Cold start function


Specifications

CAPACITY	600 VA / 360 W
Type	Line Interactive
INPUT	
Voltage	230 VAC
Voltage Range	170-280 VAC
Frequency Range	60/50 Hz (auto sensing)
OUTPUT	
AC Voltage Regulation (Batt. Mode)	±10%
Frequency Range (Batt. Mode)	60 Hz or 50 Hz ±1 Hz
Transfer Time	Typical 2-6 ms
Waveform (Batt. Mode)	Simulated Sine Wave
INDICATORS Type	
AC Mode	Green lighting
Battery Mode	Green flashing

ALARM	
Battery Mode	Sounding every 10 seconds
Low Battery	Sounding every second
Overload	Sounding every 0.5 seconds
Fault	Continously sounding
PROTECTION	
Outlets type	2x Schuko RJ-11 phone line/modem surge protection Battery Backup & Surge Protection
Full protection	Overload, Discharge & Over-charge protection Input spike protection
Humidity	0-90 % RH @ 0-40ºC (non-condensing)
Noise level	Less than 40dB

Battery	
Battery Type & Number	12V 7Ah x 1
Battery Voltage	12V
Typical Recharge Time	4-6 hours up to 90% capacity
Running time on battery (minutes)	25% Load - 21 min 50% Load - 7 min 75% Load - < 2 min 100% Load - < 1 min

Running time on battery Septu 600

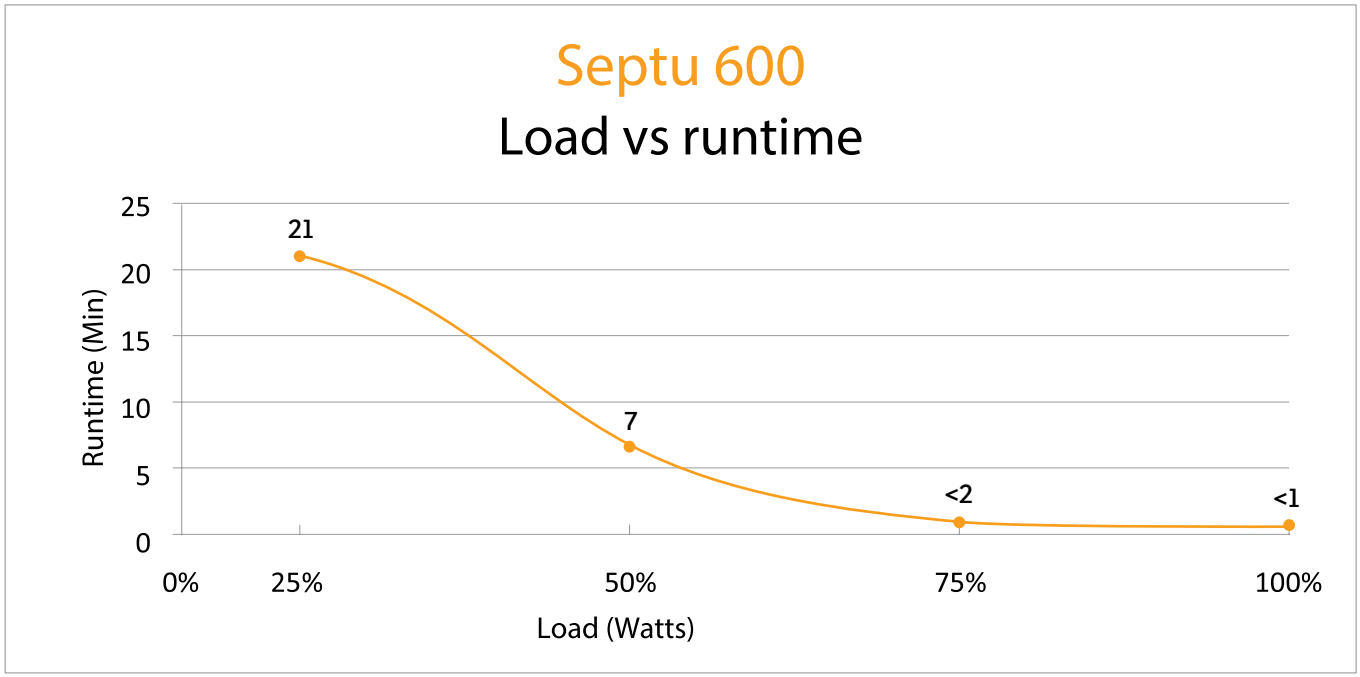

Logistics

Dimension (D x W x H)	279 x 101 x 142 mm
Carton Box Size	593 x 355 x 240 mm
Pieces in the Carton Box	4 pcs / ctn
Net & Gross weight / CTN	N.W. / G.W.: 17.81 kg / 19.0 kg

Certificates

RoHS 2002/95/EC CE